

DATASHEET

WIRELESS SOUNDER BASE/ VISUAL INDICATOR

HFW-BSB-05

The HFW-BSB-05 Wireless Sounder Base with Visual Indicator unit is an aesthetically pleasing and cost effective alternative to traditional wall mounted units where visual impact is important. Each unit has an integral moulded base for mounting a Hyfire wireless detector or a sounder cover if a detector is not required. The unit has as standard 32 recognised sounder tones and 2 levels of volume adjustment, all of which can be easily configured on site. Additional to the audible warning the unit is also fitted with a LED visual indicator for added warning capability. Utilising well-proven adaptive radio signal processing algorithms ensures the highest levels of life safety and reliability.


Hyfire



KEY FEATURES

- 3rd party approval to EN54-25 and EN54-03
- Bi-directional wireless communication
- 5 year product warranty
- Utilises dual low cost standard lithium batteries
- Choice of 32 recognised tones
- Compatible with all Hyfire translators and expanders
- Additional LED visual indicator
- Red and white cover options
- 2 volume levels
- 3 year expected battery life

TECHNICAL INFORMATION

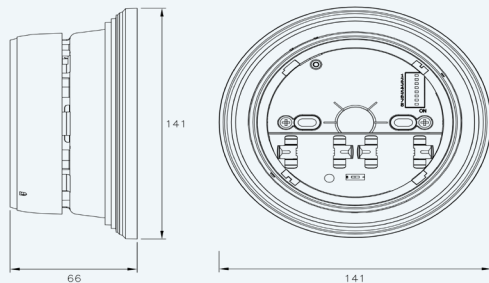

TECHNICAL SPECIFICATION

Operating frequency range	868 - 870 MHz
Operating frequency channels	7
Communication range with the Translator or Expander Module	≤ 150m (in open space)
IP rating	21C (Type A for indoor use only)
Sound Output (typical)	70-95dBA (tone dependant)
Number of Tones	32
Dimensions	141 mm x 66 mm
Weight (without batteries)	260g
Primary battery	CR123A (3 V & 1.2 Ah)
Secondary battery	CR123A (3 V & 1.2 Ah)
Operating Temperature	-10°C to +55°C
Max humidity (non condensing)	95% RH

STANDARDS & APPROVALS

BS EN 54-25:
Components using radio links and system requirements

BS EN 54-3:
Fire alarm devices

