

DATASHEET

HYFIRE TAURUS CONVENTIONAL EXPANDER MODULE

TAU-CEMD-01

TAURUS 
By Hyfire

The TAU-CEMD-01 Hyfire Taurus Conventional Expander Module has been designed to allow the integration of wireless detection and alarm type field devices onto almost any type of system. Regardless of whether the system is intelligent or conventional the unit can be simply connected to a conventional zone and sounder circuit, directly or via loop modules. The device includes a display compliant with UNI 9795, to visualise alarms and faults. The wireless field devices connect to the system as non-addressable devices, but still utilise the same technology as Taurus intelligent wireless devices. They are fully monitored for alarm and fault, ensuring the highest levels of life safety and reliability are maintained.




KEY FEATURES

- Bi-directional wireless communication
- External PSU powered
- Internal antennae design protects from environmental conditions, vandalism, accidental damage or misuse
- Low current consumption
- Devices are fully monitored for alarm and fault
- Compatible with up to 15 expander modules (8 hops)
- Compatible with wide range of conventional and addressable systems
- Site programmable via internal keypad, or via wireless or wired PC connection
- 8 pairs of network channels
- Dual channel redundancy
- Long communication range ($\cong 1$ km in open air)
- Easy scan & link programming option
- 3rd party approval to EN54-18 and EN54-25
- 5 year product warranty

TECHNICAL SPECIFICATION

Operating frequency range	868 – 870 MHz
Power supply range	9Vdc – 30Vdc
Typical current consumption	40mA (@12Vdc)
Max radiated power	14dBm (25mW)
Max no. of devices	32
Operating Temperature	-10°C to +55°C
Max humidity (non condensing)	90% RH
IP rating	65
Weight	700 g
Dimensions	235 x 160 x 70 mm

TECHNICAL INFORMATION

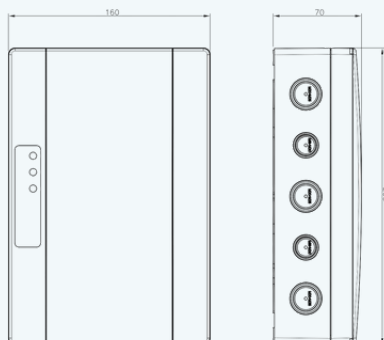

STANDARDS & APPROVALS

- BS EN54-18: Input/Output Devices
- BS EN54-25: Components using radio links and system requirements
- Compliant with UNI9795 specifications, paragraph 5.4.11.4

