

DATASHEET

HYFIRE TAURUS

BLACK SOUNDER BASE

TAU-BS-01-BL

TAURUS 
By Hyfire


The TAU-BS-01-BL Hyfire Taurus Black Sounder Base unit is a high performance wireless sounder base that can be used as stand-alone notification device (with a blanking cap) or as a combined detection and alarm device when fitted with an integral Taurus optical, heat or multi detector. The TAU-BS-01-BL unit has as standard 32+32 recognised sounder tones (primary and secondary) and 4 levels of volume adjustment, all of which can be easily configured on site. It is powered by standard lithium batteries and utilising well proven adaptive radio signal processing algorithms ensure the highest levels of life safety and reliability.



KEY FEATURES

- Only compatible with Taurus detectors
- 32 tones settings (primary and secondary for alert and evacuation), selectable via onboard dip switches
- 4 volume levels
- Bi-directional wireless communication
- Can be used with Taurus addressable and conventional translators
- 22 pairs of field channels
- Dual channel redundancy
- Long communication range ($\cong 1$ km in open air)
- 5 year battery life (including 10 seconds weekly test)
- Utilises standard low-cost lithium battery technology
- Device identification tab
- Easy scan & link programming option
- Security screw to prevent tampering and unwanted removal
- 3rd party approval to EN54-3 and EN54-25
- Red and white blanking cap options
- 5 year product warranty

TECHNICAL INFORMATION

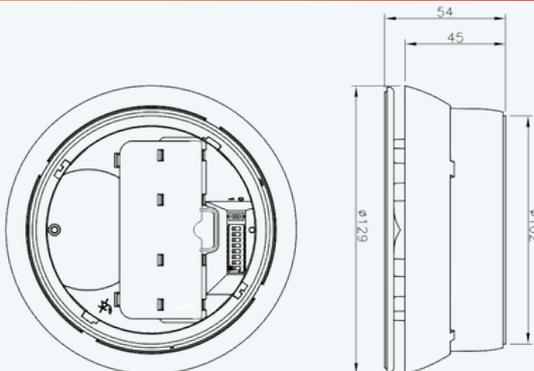

TECHNICAL SPECIFICATION

| | |
|-------------------------------|---------------------------|
| Operating frequency range | 868 – 870 MHz |
| Max radiated power | 14dBm (25mW) |
| IP rating | 21C |
| Weight (without batteries) | 224 g |
| Batteries | 2x CR123A (3 V & 1.2 Ah) |
| Battery lifespan (typical) | 5 years |
| Dimensions | 129 mm x 54 mm |
| Operating Temperature | -10°C to +55°C |
| Max humidity (non condensing) | 95% RH |
| Sound Output (typical) | 88-91dBA (tone dependent) |

STANDARDS & APPROVALS

- BS EN54-3: Fire alarm devices
- BS EN54-25: Components using radio links and system requirements

